

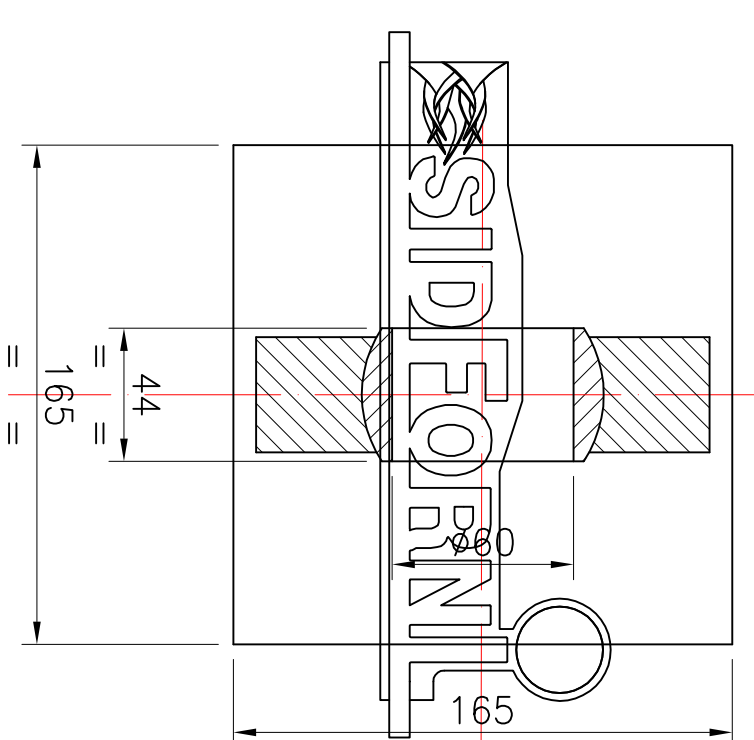
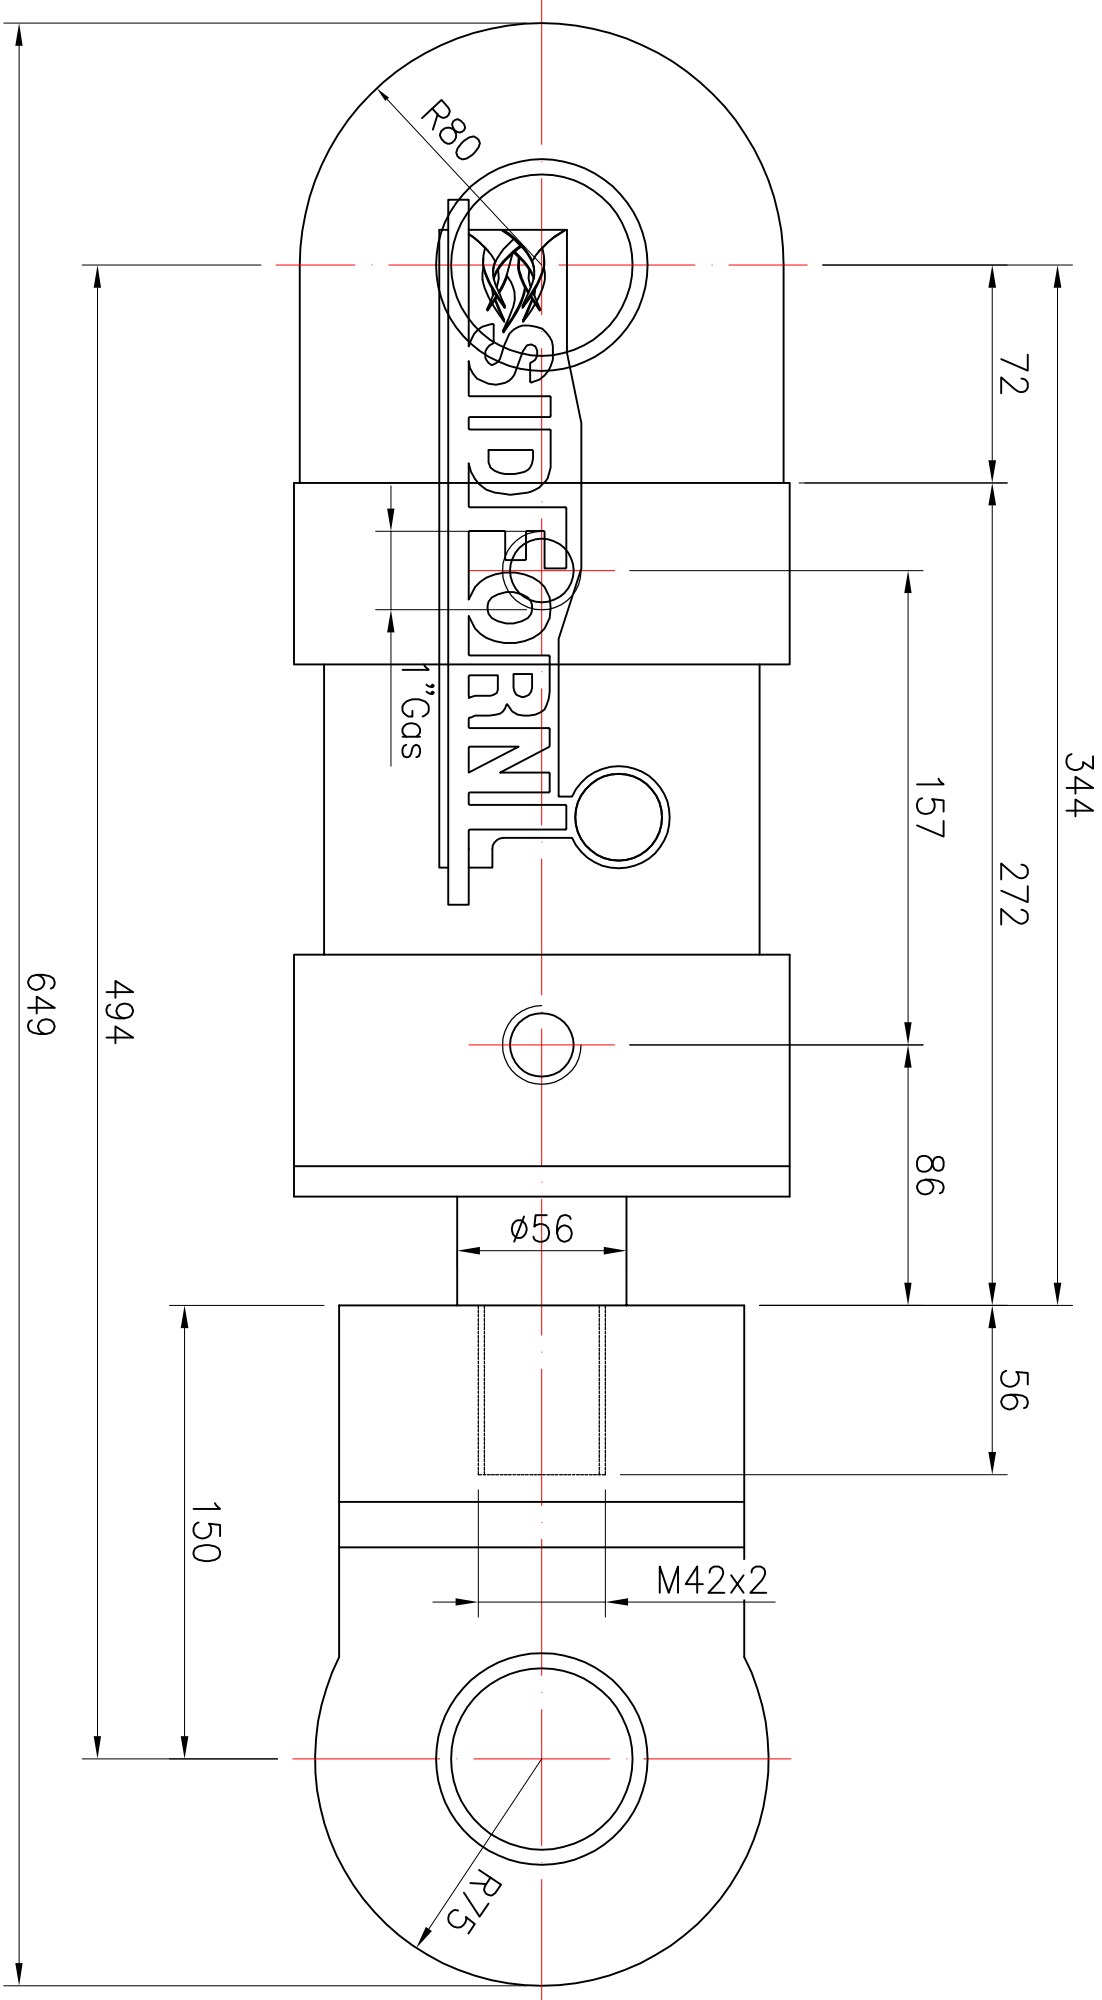


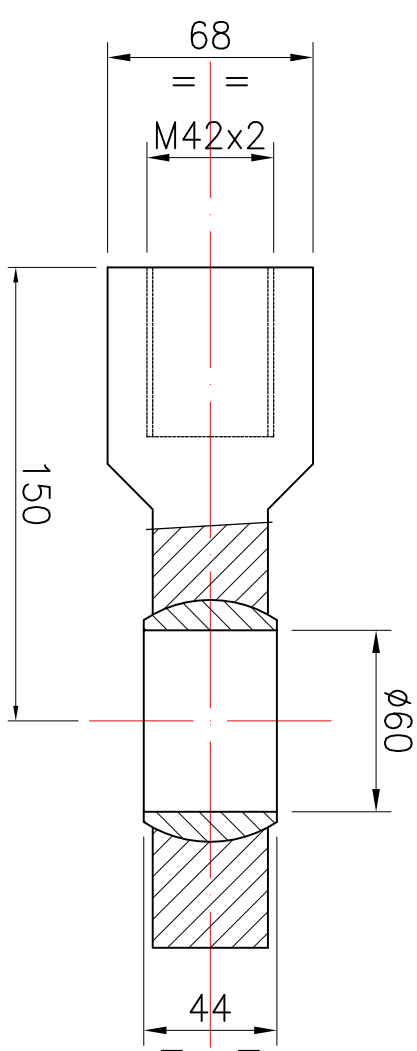

55

HYDRAULIC CYLINDER SERIES "ISO 6020/2"

BORE	=	ø125	mm
ROD	=	ø 56	mm
STROKE	=	40	mm

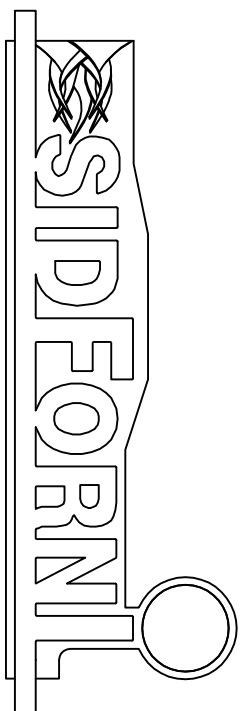

"ISO 8133/DIN 24555" BALL JOINT

ROD = $\varnothing$ 56 mm

D				
C				
B				
A	28.11.12	ISSUED FOR CONSTRUCTION	SERTEC	M.De Luca
REV	DATA	DESCRIPTION	REATTI DA	APPROVATO DA
	Date	Description	Prepared by	Checked by

The content of this sheet is S/D/FORM
S.r.l. copyright property.
The unauthorized use of this document, or
use contrary to its intended purpose, is not
permitted and shall be prosecuted by law.



Il contenuto di questo foglio e' 'proprietà esclusiva di SIDFORNI S.r.l.' l'uso non autorizzato di questo documento, o contrario allo scopo per cui è stato prodotto, è vietato e verrà 'perseguito a termini di legge.

STRADA CASSANO, 6 - 15067 NOVI LIGURE (AL) ITALY - Telefono: +39 014370620 Fax: +39 0143741281 e-mail: info@sidformi.it


ASSIEME N° 2438-TD146-01
Assembly n°

Messrs STG Group Spa - Iran Plant

WALKING HEARTH FURNACE 95 Tph

KICK OFF

HYDRAULIC CYLINDER



DISEÑO: SUDORINI S.R.L. Drawing N°: 2438-TD146-09	DISEÑO CLIENTE N° - CLIENT Drawing N°: 	REV. A	EG. SUD 09 of
---	--	--------	------------------

تاریخ قایم: ۱۴۰۵/۰۶/۰۱

פ.ו.